



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TATE SNYDER KIMSEY ARCHITECTS AND MAY NOT BE REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE ARCHITECTS WRITTEN CONSENT. AS INSTRUMENTS OF SERVICE, THESE DOCUMENTS ARE NOT FINAL AND READY FOR USE, AND THEREFORE NOT VALID, UNLESS THEY ARE SEALED, SIGNED AND DATED.
 Copyright, Ltd 2015

GENERAL NOTES

- 1 DO NOT SCALE DRAWINGS
- 2 REFERENCE ALL DISCIPLINE DRAWINGS FOR COORDINATED NOTATIONS. CONTRACT DOCUMENTS CONSIST OF ALL DRAWINGS AND SPECIFICATIONS. CONFLICTS AND DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT IMMEDIATELY
- 3 PROTECT ALL EXISTING FINISHES AND EQUIPMENT FROM DUST AND DEBRIS DURING CONSTRUCTION. PREPARE TO ACCEPT NEW WORK
- 4 PATCH AND REPAIR WALLS WHERE NEEDED TO PROVIDE FLUSH AND LEVEL SURFACE TO ACCEPT ALL NEW WALLS, WORK AND FINISHES
- 5 MASK OFF AREAS THAT ARE NOT TO RECEIVE ANY WORK TO PROTECT FROM CONSTRUCTION DUST

KEYNOTES

Consultant



Project
Douglas County Social Services Renovation
 Enter address here

Job No: 18-040.00

Owner
Douglas County

LEGEND

- EXISTING CARPET
- EXISTING CERAMIC TILE
- EXISTING SHEET VINYL
- EXISTING SHEET VINYL - WOOD

95%SD

REVISIONS		
REV	DATE	DESCRIPTION

Sheet Title
DEMO FLOORING PLAN

Date: 12.21.2018


Sheet No:

AD1.31

NOTE: REFER TO 2/AD1.01

- ALL FLOOR FINISHES, INCLUDING SUBFLOOR GLUE, ARE TO BE ABATED DUE TO ASBESTOS CONTAINING MATERIALS. ABATEMENT IS COMPLETE ONCE ALL MATERIALS TEST NEGATIVE FOR ASBESTOS.

TOTAL FLOOR FINISHES TO BE ABATED:
 4,905 SQUARE FEET

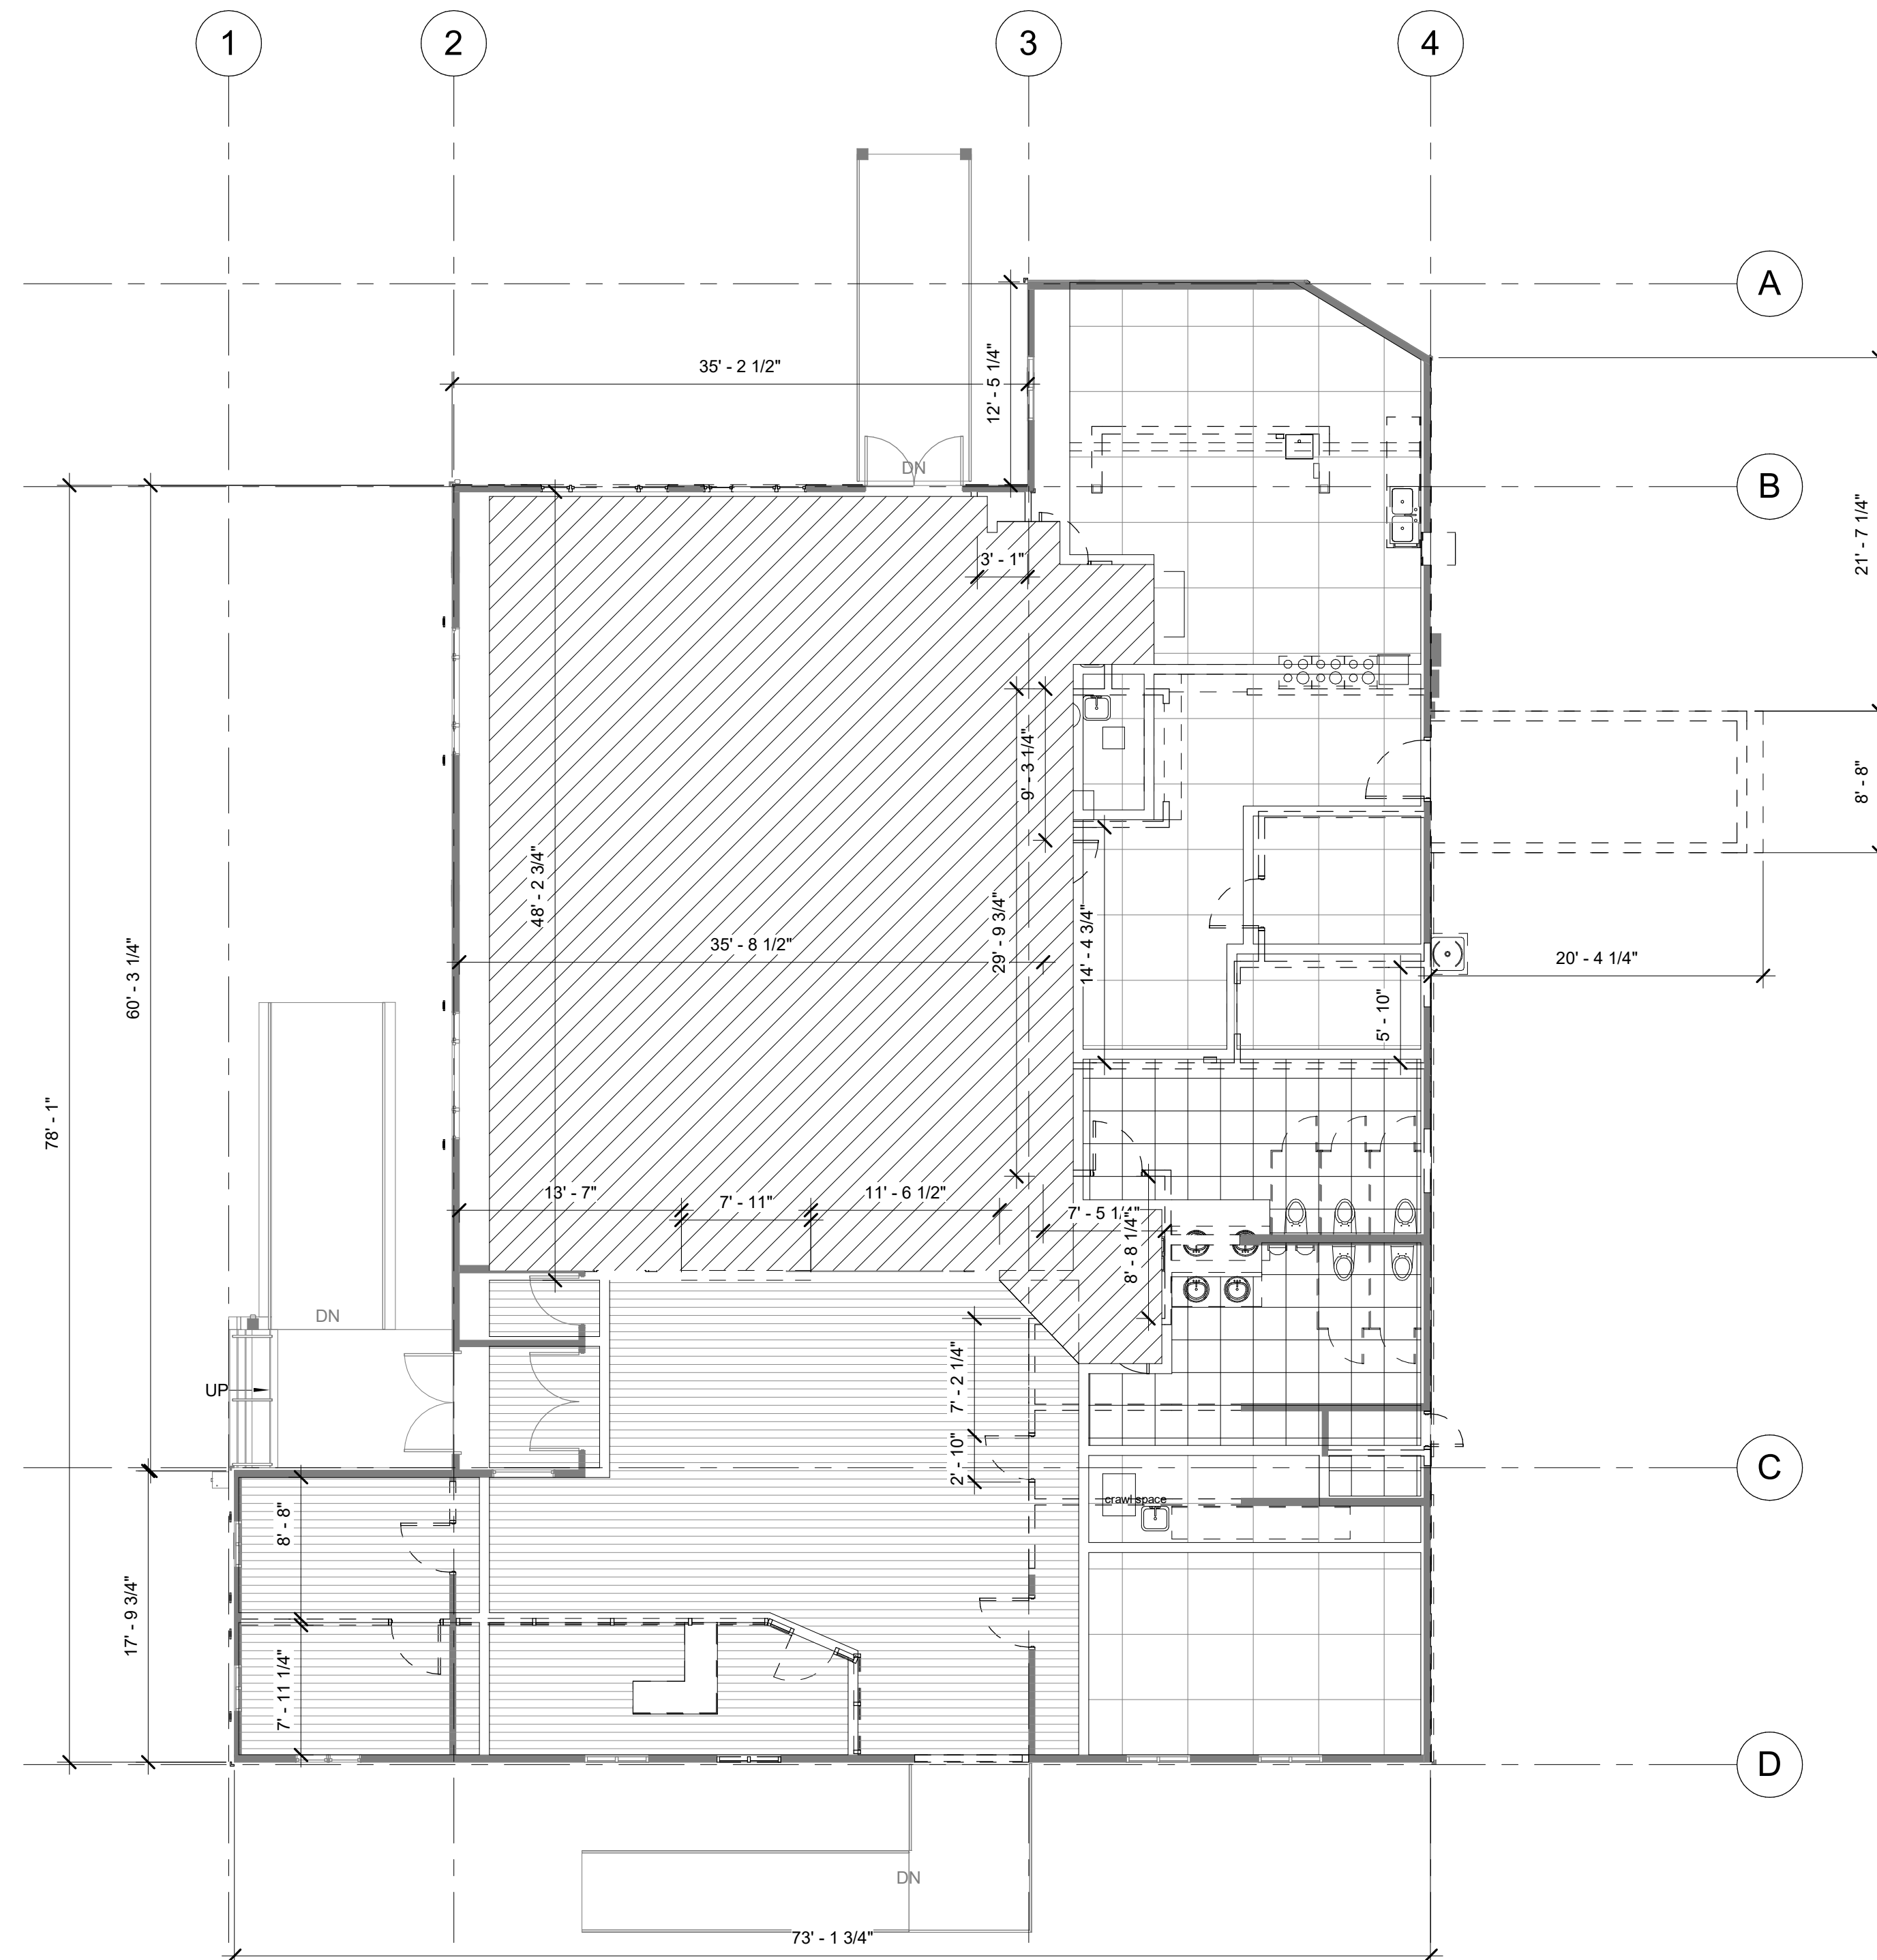

1 DEMOLITION FLOORING PLAN - LEVEL 1
 SCALE: 1/8" = 1'-0"